


END-OF-WORK CLEANING

**PORCELAIN TILES, GLAZED CERAMIC TILES,
ACID-RESISTANT MATERIALS, TERRACOTTA,
QUARRY TILES**



PHOSPHATE-FREE

- **BUFFERED ACID:** exerts a controlled and long-lasting action without developing harmful fumes, ensuring a safe working space for the installer and the environment.

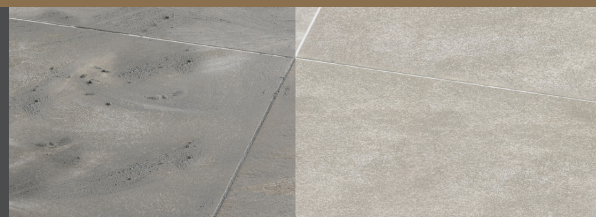

COVERAGE

APPROXIMATE COVERAGE AND DILUTION (1 litre):

Terracotta 1:5	10/20 m ²
Porcelain tiles 1:5-1:10	40/80 m ²
Natural stone 1:5-1:10	20/35 m ²

Coverage rates are indicative

Packaging

- 1 litre: boxes of 12.
- 5 litres: boxes of 4.

WARNINGS

- Keep out of reach of children.
- Do not disperse into the environment after use.

TEMPERATURES

Storage temperature: from 5° to 30° C.
The product should be applied to materials with temperature between 5° and 30°C.

WHAT IT'S FOR

- Detergent for end-of-installation washing
- Removes post-application deposits and stubborn inorganic dirt
- Eliminates saline efflorescences from terracotta
- Eliminates lime-scale from floors, showers, bathroom fittings
- Thoroughly cleans outdoor floors
- Exerts a simultaneous descaling and cleaning action owing to its high content of surfactants, without attacking the material
- Effective against traces and deposits of rust
- It helps to remove signs of engobing on ceramic and porcelain tiles surfaces

ADVANTAGES

- **New eco-advanced FORMULA:**
 1. Contains ingredients that are biodegradable up to 98%
 2. An innovative phosphate-free formula
 3. Exerts a controlled long-lasting action that improves washing efficacy
 4. Effective on residues of newly formulated admixed concrete grouts
 5. Contains EPA-compliant surfactants
- Acido tamponato, non sviluppa fumi nocivi per l'operatore e per l'ambiente
- Non altera l'aspetto e la colorazione dei materiali
- Non rovina profili ed elementi in alluminio e acciaio (cappe, condotti...)
- È multiuso: cotto, gres porcellanato, ceramica, pietre resistenti agli acidi
- È multifunzione: a seconda della diluizione pulisce e disincrosta
- Idoneo per la pulizia in conformità alla norma UNI 11493: 2016-1

HOW TO USE IT

Dilution: between 1:5 and 1:10 according to the level of dirt to be removed.

For post-installation cleaning and end-of-work cleaning:

Wet the surface with water before washing. Then use **ETERDEK PRO** diluted 1:5 or 1:10 (1 litre of product in 5 or 10 litres of water). Apply the solution over a few square metres at a time; wait a few minutes and then rub vigorously with a single-disc machine or abrasive pad.

Remove any residue using microfibre cloths or a wet vacuum cleaner and rinse with plenty of water. Should any stubborn dirt residue remain, repeat the wash with a more concentrated solution.

For routine maintenance of outdoor surfaces with evident signs of ageing (smog, dust, etc.):

Dilute 1 litre of product in 10 litres of water. Then follow the same application procedures described above.

To remove fresh limescale deposits, rust and engobe, use the product undiluted.

Caution:

Do not use on polished marble or on any materials that are sensitive to acids. Test the product on a small, inconspicuous area of the surface or loose sample to ensure resistance to the product prior to full application.