



# MULTI-SURFACE

## ALL-PURPOSE WATER REPELLENT

PRODUCT  
DATA SHEET

**DESCRIPTION:** All purpose water repellent designed to provide protection for a variety of surfaces; water-based proprietary acrylic, low odor and low VOC.

**Typical Uses:**

- ✓ Masonry
- ✓ Concrete
- ✓ Pressure-Treated Decks
- ✓ Exposed Aggregate
- ✓ Brick
- ✓ Pottery
- ✓ Plywood
- ✓ Terrazzo
- ✓ Stucco
- ✓ Stone
- ✓ Pre-Cast Pavers
- ✓ Chatahoochee

**Important:** Read all directions thoroughly. Recommended: Wear gloves and safety glasses.

**SURFACE PREP\*:** Surface must be clean, dry and oil-free. Remove oil stains with a degreaser like SEAL-KRETE Oil Stain Remover. Make sure all curing compounds and releasing agents have been removed. Repair cracks and surface breaks. Cover windows, doors, etc., before application and use caution when applying on windy days.

**Bare Concrete:** Concrete must have cured for a minimum of 30 days. Etch smooth-finished concrete (such as basement or garage floors) with a concrete etching solution like SEAL-KRETE Clean-N-Etch.

**Note:** If etching with muriatic acid the area must be neutralized before proceeding. For more information visit [www.seal-krete.com](http://www.seal-krete.com).

**APPLICATION:** Read "LIMITATIONS" section before use. This sealer is ready-to-use; do not dilute. Stir gently; Do not shake (shaking can create air bubbles which affect finish). Apply one even coat with a garden sprayer or roller. Note: Sealer goes on milky white but dries clear.

**Roller:** Dampen roller, remove excess water, then saturate roller with product. Keep a wet edge while rolling. Do not allow to puddle, foam or run. (Use a 1/4" nap for smooth surfaces, 3/8" nap for rough or porous surfaces.)

**Pump Sprayer:** Set at a fine spray and apply using a circular motion. To eliminate puddling or to achieve a more uniform finish, backroll immediately after spraying.

**COVERAGE:** 150–300 sq.ft. per gallon (varies based on surface porosity). Apply one coat for dustproofing; two coats for a satin finish. Second coat coverage is 50% greater.

**DRY TIME:** Dry to touch in 1 hour, recoat in 2 hours, allow foot traffic in 24 hours, vehicular traffic in 72 hours (77°F, 50% RH).

**CLEAN-UP & STORAGE:** Clean all tools immediately after use with soap and water. Store unused product in a dry place above 50°F. Do not use solvent-based cleaners on surface; clean occasionally with a mild soap and water solution. KEEP FROM FREEZING.

**LIMITATIONS:** Temperatures should be 50° to 90°F (10° to 32°C) and should not fall below 50°F (10°C) within 24 hours of application. Do not apply if rain is expected within 12 hours. Do not use over acid-based stains

or two part water-based or solvent-based epoxy coatings. Do not use on glazed tile. Do not use in areas subject to hydrostatic pressure. Smooth-finished concrete may be slippery when wet; consider using an anti-skid additive like SEAL-KRETE Clear Grip on high foot traffic areas.

*\*Sanding or removing paint containing lead may be hazardous. For information contact the National Lead Information Center at 1-800-424-LEAD or [www.epa.gov/lead](http://www.epa.gov/lead).*

**CAUTION:** Contains 1-phenoxy-2-propanol. Irritating to skin, eyes & respiratory system. Wear suitable protective clothing, gloves and eye or face protection.

**FIRST AID: SKIN CONTACT:** Wash off immediately with soap and water. Seek medical attention in the event of rashes or persistent irritation. **EYE CONTACT:** Flush eyes repeatedly with lukewarm water. Seek medical attention. **IF SWALLOWED:** Do not induce vomiting, give 1–2 glasses of water if conscious. Seek medical attention. **KEEP OUT OF REACH OF CHILDREN AND PETS. DO NOT TAKE INTERNALLY.**



Product	No.	Unit	UPC Code	Carton Bar Code	Carton Size (W x D x H)	Cube / Wt. (cubic ft / lbs)	Carton Qty	Pallet Qty
Multi-Surface Water Repellent	SK201001	1 gallon	0 15944 20101 7	1 00 15944 20101 4	15 x 9.5 x 13.00	1.07 / 36.63	4	36 cs
Multi-Surface Water Repellent	SK201005	5 gallon	0 15944 20105 5	–	–	1.30 / 45.17	1	36 ea



# MULTI-SURFACE

## ALL-PURPOSE WATER REPELLENT

- EXCELLENT DURABILITY
- EXTERIOR USE
- FOR UNCOATED HORIZONTAL & VERTICAL SURFACES

### TECHNICAL INFORMATION

- Clean-up: soap and water
- Shelf life: 2 years min. (closed container)
- Visual appearance: milky white (wet); dries clear
- Tire marking: resistant to most tires
- Proprietary acrylic blend
- ASTM G-53 ultraviolet resistance: excellent
- ASTM D-1640: dry-to-touch 15 min; dry to recoat 4 hours; dry to light foot traffic 24 hours; dry to vehicular traffic 72 hours
- ASTM D-3359B intercoat adhesion: excellent
- ASTM D-3363 Konig hardness: 54.5
- ASTM E-70: 8.75
- VOC < 219 g/L – EPA Method 24 Waterproofing Sealer Category

### CHEMICAL/SOLVENT RESISTANCE

(One hour spot test)

- Gasoline: resistant
- Oil: resistant
- Water: resistant
- Salt: resistant
- Chlorine: resistant


**LIMITED WARRANTY:** Manufacturer/Seller makes no warranty of any kind except that this product is free from defect and is of merchantable quality. Buyer remedy for breach of warranty is limited to replacement of SEAL-KRETE product or refund of purchase price. Convenience Products will not be responsible for labor or the cost of labor for removal or application of any product.

**TECHNICAL SUPPORT:** For more information on surface prep or application guidelines, or to obtain a Material Safety Data Sheet, call 1-800-323-7357, M-F (8:00 am–5:00 pm EST) or visit our website at [www.seal-krete.com](http://www.seal-krete.com).

### PROTECTS AGAINST WATER PENETRATION

### RESISTS OIL STAINS, SALTS AND HOT TIRE PICKUP

### EXTREME BEADING, NON-YELLOWING

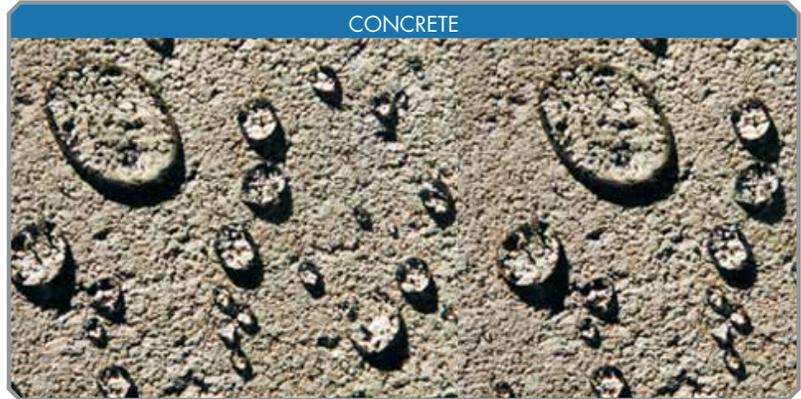

11 Hawthorn Pkwy., Vernon Hills, IL 60061

Questions or comments? Call 1-800-323-7357

[www.seal-krete.com](http://www.seal-krete.com)

©2017 Rust-Oleum Corp

## EXTREME BEADING – NO WAX FORMULA

64049-082117-SK